



# Q-LIGHT

Lightweight EN/LTF-C





**TRIPLE SEVEN**

# USER MANUAL

Version 1.0, Date: 1.1.2018



# Introduction

## Welcome

Welcome to the Triple Seven Team! We are excited that you have chosen to fly our Q-light. The Q-light is developed for maximum performance while maintaining the ease of flight of an EN/LTF-C class glider. This glider is designed to be your next step in XC and competition flying. We wish you lots of exciting flying adventures!

## Triple Seven Mission


Our company's goal is to produce high-quality products and technologically innovative gliders of all types and classes. We are striving to develop state-of-the-art paragliders, with the optimum compromise between safety and performance. Your success is our inspiration; our goal is your success.

This document contains complete product information and instructions to familiarise you with the main characteristics of your new glider. It contains instructions on how to use and maintain the wing. It is not written to serve as learning material for piloting this kind of wing. This is not a flying manual! Flying can only be taught by flying schools and certified instructors.

It is important that you take time to read this manual carefully before the first flight, as thorough knowledge of your equipment enables you to fly safely and to develop your full potential. If you sell, lend or give your glider to another pilot, please pass this manual on with it.

If any use of Triple Seven equipment remains unclear after having read this manual, please contact: Your local paragliding instructor, your Triple Seven importer or Triple Seven directly. This product manual is subject to changes without prior notice. Please check [www.777gliders.com](http://www.777gliders.com) for the latest information regarding our products.

Summary			
<b>1. LTF / EN</b>	1	7.2. Preflight check equipment	13
<b>2. C</b>	1	7.3. Final preflight check	14
<b>3. High performance EN/LTF-C</b>	3	7.4. Inflation, control, take-off	14
<b>IV. Introduction</b>	4	7.5. Line knots or tangles	14
IV.i. Welcome	4	7.6. Normal flight, best glide	15
IV.ii. Triple Seven Mission	4	7.7. Minimum sink	15
<b>5. Q-light</b>	7	7.8. Accelerated flight	15
5.1. Designer's thoughts	8	7.9. Active flying	15
5.2. Who is this glider for?	9	7.10. Flying in turbulence	16
5.3. Certification	9	7.11. Fast decent techniques	18
<b>6. Before flight</b>	10	7.12. Winch launch	19
6.1. Elements, components	10	7.13. Aerobatics	19
6.2. Visual inspection	10	7.14. Primary controls failure	19
6.3. Harness	11	7.15. Flying in rain	19
6.4. Accelerator settings	11	7.16. Landing	20
6.5. Brakes' adjustments	11	<b>8. Maintenance</b>	20
6.6. Weight range	12	8.1. General advice	20
6.7. Wing inflation	12	8.2. Packing instructions	21
6.8. Modifications on the glider	12	8.3. Storage	21
6.9. Preflight safety	12	8.4. Cleaning	21
<b>7. Flying Q-light</b>	13	8.5. Repair	21
7.1. First Flight	13	8.6. Checks and control	21
		<b>IX. Packing Q-light</b>	22-23
		<b>10. Technical data</b>	24
		10.1. Technical data	25
		10.2. Materials description	26
		10.3. Q-light risers arrangement	27
		10.4. Line plan Q-light	28
		10.5. Line lengths Q-light	30-37
		<b>XI. Safety and responsibility</b>	38
		<b>XII. Guarantee</b>	39
		<b>XIII. Registration information</b>	40
		<b>XIV. Get involved</b>	40
		<b>XV. Contact</b>	41

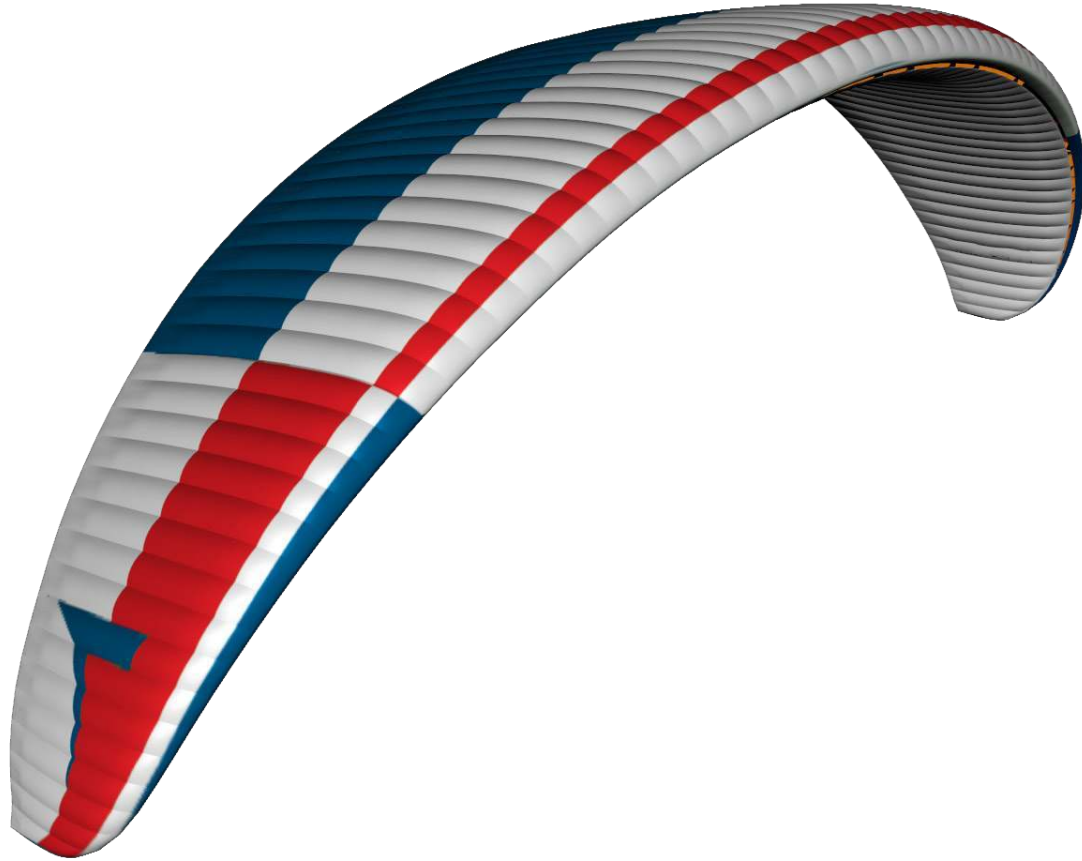



- » Reinforced leading edge (RLE), Smooth trailing edge reinforcements (STE) together with (BPI), for greater stability and good gliding performance across the wide speed range
- » BPI - back position intake technology, for spin and stall resistance and good stability at accelerated flight.
- » Low induced-drag wing tip (LDW), optimized washout with two additional floating cells.
- » 4 cells diagonals (RLE) reinforced leading edge
- » Nice pitch stability and ease of piloting
- » Trim speed optimised for climbing
- » Clean canopy with refined sail tension
- » Direct handling with precise control
- » Full-span distributed panels orientation, streamlined to airflow direction
- » Improved 3d shaping (ballooning) at the leading edge
- » High-end EN/LTF-C glider





## Designer's thoughts

The Q-light was designed to provide a new wing for the C class pilots. The goal was to combine the knowledge that we gained while designing the rest of the Triple Seven wings, into something, that will surpass the existing C class with its performance and ease of use.

The Q-light is a wing, placed firmly in the C class category with refined profile and extensively complexed internal structure.

All in all to provide best package for the XC pilot, reaching new goals with an ease of flight.





Paraglider is not recommended for less experienced pilots than the C class.

The Q-light has passed the European EN-LTF C certification for all commercially available sizes. The homologation results may be found at the end of this manual.



# Before flight

## Elements, components

The Q-light comes with a backpack, inner bag, glider strap, Triple Seven T-shirt and USB key with this manual.

## Visual inspection

Before you rush to the first take-off we recommend that you take your time to unpack and test your equipment on a training slope. In this way you will have time and will not be distracted or rushed to prepare your equipment, and you will be able to do your first pre-flight check properly.

The place should be flat, free of obstacles, and with light wind. This will enable you to nicely inflate the wing and also familiarize yourself with it while ground handling. Your new glider will have been checked already by your Triple Seven dealer, however, as a pilot you want to do a proper pre-flight check yourself.

Prepare and spread out the glider like you normally would. While you are spreading out and walking along the glider, observe the fabric material for any abnormalities. When you are done with the inspection of the canopy, grab the risers and spread the lines, check if the risers and line maillons (carabiners) are properly closed. Identify and disentangle the A1, A2, B, C risers and the lines, including the brake lines. Connect the risers' main attachment points correctly to the harness, watch for any twists and make

sure that the main carabiners are properly closed.

## Harness

The Q-light has passed EN-C certification testing using a GH - ABS type harness. This certification allows the Q-light to be flown with most harnesses on the market, but keep in mind that changing the harness greatly influences the feeling of the glider, depending on the effectiveness of the harness weight shift. Check with the harness manufacturer or with your instructor whether your harness is of the proper type.

The length of the harness chest strap affects the distance between the main carabiners and the wing's handling as well as your stability in the harness. Tightening the chest strap increases your stability, but greatly increases the risk of twisting after a collapse. A tight setting also increases the tendency to maintain a deep spiral. As a rule of thumb, a more opened chest strap gives you more feedback from the glider, which is good for your climbing efficiency and increases safety in a flying incident. But we strongly recommend adjusting the length of the harness chest strap according to the lengths used during certification. This setting varies from 42cm to 50cm depending on the harness size.

Check the settings used during testing under the certification specimen section. We recommend making your first flight with the Q-light using a familiar harness. As a rule of thumb, if you want to experience the feeling of new equipment, change only one component at a time.

## Accelerator settings

The Q-light speed system increases the speed of the glider by 20km/h with the accelerator at full travel, from trim speed at 40km/h to full speed at 60km/h.

Before attaching the accelerator system to the Q-light risers, check that the speed system inside your harness is correctly routed and that all pulleys are set correctly. Make sure there are no knots or other obstacles that might make the accelerator get stuck during usage.

The length of the speed bar lines should be adjusted on the ground so that your legs are fully extended at the point of full accelerator travel. While setting the speed line lengths make sure they are long enough, so that the speed system does not accelerate the glider by itself. If in doubt how to properly set the accelerator system, please consult your instructor or Triple Seven dealer.

## Brake line adjustments

The length of the brake lines has already been adjusted by the manufacturer and is the same as used during the certification test flights. The length is set and fine-tuned during the development of the glider, therefore generally there should be no need for adjustment. We recommend flying this setting for a while, and you can still change it afterwards if you wish to do so. If you change the length of the brake lines, do it in a step by step process of 2 cm at a time. Bear in mind that if you make the brake lines too short, they might be applied unintentionally when the speed system is engaged. The brake travel is greater than, up to 80 kg - 55 cm, from 80 kg to 100kg - 60 cm and over 100 kg - 65 cm.

# Weight range

Each size of the Q-light is certified for its own weight range. The above mentioned weight includes the weight of the pilot and complete paragliding equipment, together with the glider, harness, all accessories and optional ballast. Every glider changes its characteristics when changing the take-off weight. We recommend that you always fly your glider in the specified weight range. To measure your take-off weight, step on a scale with all your equipment packed in the rucksack.

## **Lower half of the weight range**

Flying the Q-light, as any other glider, in the lower part of the weight range, causes the agility of the glider to decrease, and when flying through turbulence its tendency to collapse increases slightly compared to flying it in the upper wing loading range. However, reactions after a collapse are less dynamic and sink rate improves. Therefore, if you mainly fly in weak conditions, you might prefer this weight range.

## **Upper half of the weight range**

Again, as with any other glider, flying the Q-light in the upper part of the weight range increases the stability and agility of the glider. Consequently, there is a slight increase in the glider's speed and even gliding performance, especially when flying into wind. If you normally fly in stronger conditions and you prefer relatively more dynamic flying characteristics, you should aim to load up for the higher weight range. Reactions after a collapse may be more dynamic in the upper half of the weight range.

# Wing inflation

Still being on the training slope and having prepared and checked everything, inflate your wing and play with it to get a feel of your new glider while ground handling. By doing this you are making a final check of the canopy and lines, and that everything is in order. You will find that the Q-light inflates very easily and smoothly without excessive energy and with minimum pressure while moving forwards. For inflation and lifting the glider you may use only the A1 risers. Do not pull on the risers just with your hands, instead use your whole harness. Your hands should only accompany the rising movement of the wing. When the wing is above you, apply correct pressure on the brake lines and the glider will stay above you.

# Modifications on the glider

Any modifications of the lines or risers' speed system cause the loss of the certification, as does flying the wing outside the weight range.

# Preflight safety

Before flying the Q-light, you should obtain all practical and theoretical training and the certification for flying this kind of wing. Pilots should be physically and mentally fit, using complete paragliding equipment and flying only in conditions suitable for their level of flying expertise.





# Flying the Q-light

## First Flight

Now that you have already familiarised yourself with your new glider while ground handling on a training slope, you are ready for your first flight. For the first flight we recommend that you choose a familiar flying area and that you fly your new glider in calm conditions.

## Preflight equipment check

Before every flight you need to do a pre-flight check and to inspect any other equipment. Learn to do this, as it takes no extra time. This procedure may vary, depending on the instructor, pilot or equipment settings. Some pilots have their wing always connected to the harness. However you should have a consistent method of checking and preparing your equipment and doing the final pre-flight check.

1. After the arrival on take-off, assess the suitability of flying conditions.
2. While walking around the canopy preparing and spreading out the wing, you should at the same time inspect the canopy.

3. After you check the lines and connect the risers to the harness, grab the lines and slide them through your fingers as you walk towards the canopy. In this way you double check that the lines are not tangled, stuck or damaged. If meanwhile the canopy moves, walk around and correct it again.
4. Inspect the harness, reserve, speed system and all connections.

## Final preflight check

1. Strap into the harness. The leg straps should be the first to be connected on the take-off and the last ones to be released after the flight. Make sure you are strapped in correctly and wearing a helmet.
2. Check the risers for twists, and that the carabiners are properly closed. Check that the speed system is not affecting your risers – accelerating unintentionally.
3. Check the lines. The A riser lines should be on top, and all lines untangled. Check that none of the lines are lying over or below the canopy.
4. Check the canopy. The glider should be spread out in the shape of an arch and all cells open.
5. Check the wind, take-off and airspace. The wind should be favourable for take-off and the pilot's level of expertise. Airspace should be clear, together with the take-off area.

## Inflation, control, take-off

The Q-light has easy take-off behavior and does not require any additional advice regarding the forward or reverse launch. Try to divide and practice the take-off procedure in three steps.

1. Inflating and raising the glider
2. Controlling the wing and wing check
3. Accelerating and take-off

It is always advisable to practice and improve proper launching techniques as this reduces unnecessary additional stress before the take-off.

Wind speeds up to 25 to 30km/h are considered strong and extra care is required for the flight. If you are launching in strong winds we recommend the reverse launch technique, with your brakes in the right hands at all times. Launch the glider with a gentle pull and then walk towards it if necessary to reduce the relative wind force. When the glider is above you, gently control the wing and take off.

## Line knots or tangles

If you fail to observe a line knot or you find yourself flying with a knot before being able to prevent the unintentional, uncontrolled take-off, try to stay away from the ground or other pilots by flying away from the mountain, before taking any corrective action on the wing. This means that you weight shift and/or counter brake the opposite side of the wing and control the flying direction with the least amount of force needed for the wing to fly straight away from the mountain. Be careful not to apply too much brake or to fly too slowly to avoid a stall or spin. When you are at a safe distance away from the mountain and you have gained relative height by flying away, you may want to gently and briefly pull the lines that are tangled with the knot. If the knot is on the brake lines you might want to gently and briefly “pump” the appropriate brake line. Please note that by pulling the lines, the knot may get stuck

in a worse position and the situation may escalate also to a stall or spin. Therefore, if you estimate that you can control the wing relatively safely and that the knot is not released by gently and briefly pulling the tangled lines, immediately fly to the landing zone and land safely.

## Normal flight, best glide

Without any brakes applied and without using the accelerator, the wing flies at the so-called “trim speed“. In calm air this is theoretically the best glide speed. The best speed glide depends on the glider’s polar and air mass, vertical and horizontal speed. We recommend reading more about the theory of the best glide and McCready theory.

## Minimum sink

If you apply brakes on both sides for about 10 -15 cm you will slow the glider to the theoretical minimum sink speed. But we do not recommend using this speed even for thermalling, as you achieve much better climbing and control by letting the glider fly with its “trim speed” and natural energy. With a proper take-off weight you will find that the glider has great climb, reactions and agility.

## Accelerated flight

After you get comfortable flying the Q-light, you can start practicing using the speed system, which will provide better performance while gliding against the wind and through a sinking air mass. The Q-light was designed to be stable through its entire speed range,

but this requires the use of active flying techniques. Note that any glider becomes less stable while flying accelerated and that the risk of a collapse is higher in accelerated flight. Additionally, the reaction of the glider to a collapse in accelerated flight is more dynamic in comparison with the one which occurs at trim speed. We recommend that you avoid accelerated flight near the ground, and that you are very careful when using the accelerator in turbulent conditions. Use a soft speed bar, which enables you to accelerate the glider by using only one leg. To control the direction use weight shift. To control the pitch change the amount of the speed bar. Do not use or pull the brakes while using the speed bar. Use the speed bar progressively when accelerating and instantly release when you feel a slight loss of tension, pressure or even a collapse. If you encounter a collapse while using the accelerator, release the speed bar immediately before taking any other corrective action. Always keep more distance from the ground when using the speed bar.

## Active flying

This is a basic flying technique for any pilot. It implies permanent control and the correction of pitch and roll movements together with the prevention of any deflations or collapses. In a nutshell this means flying straight through active or turbulent air, so that the pilot keeps the glider above their head at all times, compensating and correcting any unwanted movements of the wing.

### **A few examples:**

- While entering a strong thermal, the wing will stay a little bit behind relative to the pilot. The pilot should let the brakes up, allowing the wing to fly faster and to catch up.



- If the wing surges in front of the pilot, the pilot should counter brake until the surge is controlled and then release the brakes to let the glider fly normally again.
- If the pilot feels a loss of tension on the wing or a loss of pressure on the brakes on one side of the wing, they should smoothly apply brake on the side with loss of pressure and/or weight shift to the opposite side until the pressure returns. After that, again release the brake and/or weight shift to the neutral position and let the glider fly normally.

The key in all cases is to avoid an over-correction and not to maintain any correction longer than necessary. After each input, let the glider fly normally again, to re-establish its flying speed. You can train or get a feeling for most of these movements safely on the ground while ground handling your glider. Good coordination of your movements and coordination with the wing on the ground will allow you a quick progression when flying actively in the air. The next step is to attend SIV courses where you should also get a better understanding of the full brake range and the glider's speeds.

## Flying in turbulence

Wing deflations can occur in a strong turbulence. The Q-light is designed and tested to recover without pilot input in almost all situations, by simply releasing the brakes and letting the glider fly. To train and understand all the manoeuvres described, attend SIV courses.

### **Cascade of events**

Many reserve deployments are the result of a cascade of

over-corrections by the pilot. Over-corrections are usually not problematic because of the input itself or its intensity; but due to the length of time the pilot continues to over-handle. After every input you have to allow the wing to re-establish its normal flying speed. Note that over-corrections are often worse than no input at all.

### **Asymmetric deflations**

Strong turbulence may cause the wing to collapse asymmetrically. Before this occurs the brake lines and the feeling of the harness will transmit a loss of pressure to the pilot. This feedback is used in active piloting to prevent a collapse. If the collapse does occur, the Q-light will easily re-inflate without pilot reaction, but the wing will turn towards the collapsed side. To prevent this from happening, turn and actively recover the asymmetric collapse by weight shifting and applying appropriate brake input on the side that is still flying. Be careful not to over-brake your wing's flying side. This is enough to maintain your course and give the glider enough time to recover the collapsed side by itself. To actively reopen the collapsed side after course stabilisation, pull the brake line on the collapsed side firmly and release it. You can do this several times with a smooth pumping motion. After the recovery, release the brake lines for your glider to regain its trim speed. You must be aware of the fact that asymmetric collapses are much more dynamic when flying accelerated. This is due to the difference in weight and the inertia of the canopy and the pilot hanging below.

### **Symmetric deflations**

Symmetric or frontal deflations normally reopen immediately by themselves without pilot input. The glider will then regain its airspeed accompanied by a small surge forwards. To actively

control this event, apply both brakes slightly when the collapse occurs and then instantly release the brakes to let the glider fly. Be prepared to compensate for the glider's slight surge forward while returning to normal flying.

### **Wing tangle, cravat**

A cravat is very unlikely to happen with the Q-light, but it may occur after a severe deflation or in a cascading situation, when a wing tip may get caught in the glider's lines. A pilot should be familiar with the procedure of handling this situation with any glider. Familiarise yourself with the stabiliser main line ("stabilo" line, outside B-line on B riser) before launching. If a cravat occurs, the first thing to do is to try to keep the glider flying on a straight course. Do this by weight shifting and counter braking the untangled side. After that, grab the stabilo main line on the tangled side and pull it down until it becomes tight again. At this point the cravat normally releases itself.

Possible solutions of the cravat situations (consult your SIV instructor):

- Pulling the wing tip "stabilo" line
- Using a full stall, but it is essential to be very familiar with this manoeuvre. You will also want to have a lot of relative altitude.
- If you are in a situation where you have a cravat and you are low in rotation or even with twisted risers, then the only solution is the reserve parachute.

### **Negative spin**

In normal flight you are far from negative spin. But, certain circumstances may lead to it. Should this occur, just release the brake lines progressively and let the wing regain its flying speed.

Be prepared for the glider to surge forward, and to stop the surge with brake input if necessary.

### **Full stall**

A full stall does not occur unintentionally on its own – it happens if you pull both brakes down 100% and hold them. The wing then performs a so-called full stall. Releasing the brakes improperly may lead to a massive surge of the glider with danger of falling into the canopy. This is a complex manoeuvre and as such outside the scope of this manual. You should practice and learn this manoeuvre only on a SIV course under professional tuition.

### **Deep stall**

Generally when in deep stall, the wing has no forward motion and at the same time high sink speed. When in deep stall the wing is almost fully inflated. With the Q-light it is very unlikely to get into this situation unintentionally. This could possibly happen if you are flying at a very low speed in turbulent conditions. Also the porosity of the material and line stretch on a very old glider may increase the likelihood of a deep stall. If you trained this manoeuvre during a SIV course you will know that it is very hard to keep the Q-light in deep stall. If you apply the brakes a little bit too much you enter the full stall. If you release the brakes just a little bit too much the wing returns to normal flight. If you want to practice the deep stall on SIV courses, you need to master the full stall first.

# Fast descent techniques

Fast descent techniques should be familiar to any pilot, as they are important resources to be used in certain situations. These manoeuvres should be learned at your flying school as a part of paragliding pilot training. Nevertheless, we recommend practicing these manoeuvres on SIV courses under professional supervision.

## Big ears

This is a safe method to moderately loose altitude while still maintaining forward speed. To do big ears, release any brake line loops around your wrist, set your leg on the speed bar, but do not push it. Now pull the outer A lines (the A2 risers in the drawing) on both sides. As long as you keep the A2 risers pulled, the wing tips stay folded and the sink speed increases. To regain normal flight, release the A2 risers, and if necessary apply the brakes with short impulse movements. Release big ears at least 100 meters above the ground. While using big ears, the wing speed decreases, which is why we also recommend using the accelerator half way in combination with big ears to maintain enough horizontal speed, and to additionally increase vertical speed. Be careful not to pull the brakes while flying with big ears! Steering is done by weight shift only. Always do the big ears first and then accelerate; not the other way around as you will risk getting a frontal collapse.

## B line stall

While in the B-stall the glider has no horizontal speed and the sink rate increases to about -10m/s. To enter the B-stall reach for the B risers just above the maillons and pull both B line risers symmetrically down for about 20 cm. To exit the manoeuvre, simultaneously release both risers quickly. On exit the Q-light

gently dives without deep stall tendencies.

## Spiral dive

The spiral dive is the most demanding of all three manoeuvres (Big ears, B-stall, Spiral) and should only be trained gradually and always with plenty of altitude. The spiral dive should be practiced and learned on a SIV course under professional supervision. To enter the spiral, weight shift to the desired side and gradually apply the brake on the same side. Then let the wing accelerate for two turns and you will enter the spiral dive.

While in the spiral, you can control your descent rate and bank angle by applying more or less inner brake. Depending on how steep the spiral is you may need to use also outer brake. To exit the spiral dive we recommend that the pilot is in the neutral weight shift position. If you release the inner brake, the wing exits the spiral dive by itself.

The Q-light has no tendency to become stable in the spiral until -14m/s descent, but you should be aware of the procedure for exiting a stable spiral.

To exit a stable spiral dive, weight shift to the opposite side of the turn and apply the outer brake until feeling the deceleration of the wing rotation. Then release the outer brake and let the glider decelerate for the next couple of turns. To avoid a big pendulum movement after exiting the spiral, apply a short brake input on the inner side before the glider exits the spiral.

Warnings (Spiral dive):

- There is a possibility of losing consciousness while in the

spiral dive. Never make a spiral with more than 16-18m/s descent speed.

- In fast spirals it may be necessary to apply the outer brake to begin exiting the spiral dive.
- If practicing the spiral dive low, a pilot may not have enough altitude or time to safely exit this manoeuvre.

## Winch launch

The Q-light is easy to tow-launch using a winch and has no special characteristics to consider during this form of launching. To practice this launching technique special training is needed and you have to

be aware of the procedures and dangers, which are specific for towing. We do not recommend using any special towing device which accelerates the glider during the winch launch.

## Aerobatics

The Q-light was not designed for aerobatics, therefore, these may not be performed on this glider. In addition to this, any extreme manoeuvres place unnecessary stress on the glider and shorten its lifespan.

## Primary controls failure

If for any reason you cannot use the brake lines, you have to pilot the wing to the landing place by using weight shift. Weight shift should be enough to safely land the glider. You can also use the C risers to control and steer the wing. Be careful not to over-handle the glider by using the C riser technique when steering. By pulling the C risers too strong you can cause a stall or a negative spin. Land your glider at trim speed without using the

C risers, to avoid over-handling the glider low above ground. We recommend using weight shift.

## Flying in rain

If you are accidentally caught-out in a rain shower, it is best to land immediately. If your wing becomes wet in the air it is advised to maintain accelerated flight using the speed bar and/or releasing the trimmers, even during the final approach. DO NOT use big ears as a descent technique, big ears increases drag, and with a wet wing this will further increase the chances of a parachutal stall occurring. Instead, lose height with gentle 360's and maintain your air speed at all times. If your wing enters parachutal stall when wet, immediately release the trimmers and accelerate the wing to regain airspeed.

# Landing

Similarly to the take-off, the Q-light landing characteristics are easy. In turbulent conditions it is advisable to apply about 15% of brake input, to increase stability and the feeling of the glider. Before landing, adopt the standing position as this is the most effective and the safest way to compensate the touch down with your legs. Again we recommend training the landing manoeuvre, as it might be useful to be able to land in small places, especially in an unknown cross country terrain. Learn to evaluate the wind direction by observing the signs on the ground and also your drift while making turns. This is useful for cross country flying, when landing outside of your usual landing field. Another advice we suggest taking into account in stronger winds is to go higher for the landing fields and thus assuring that you reach them. Likewise, always look for possible alternatives downwind.

# Maintenance

## General advice

Careful maintenance of your glider and the following simple guidelines will ensure a much longer airworthiness and performance of your wing:

- Pack your glider after you land and do not unnecessarily expose it to UV radiation by leaving it on the landing site unpacked. The sun UV radiation degrades the cloth and line materials.
- Fold your glider like recommended under "packing instructions".
- If the glider is damp or wet when you pack it, partially unfold it at home to allow it to dry. Do not dry it in direct sunlight.
- Avoid exposing the glider to violent shocks, such as the leading edge hitting the ground.
- Avoid dragging the glider on the ground or through rocky terrain as you might damage the lines or canopy.
- Avoid stepping on the lines or canopy, especially when they are lying on a hard surface.
- Avoid exposing the glider to salt water, as it damages the lines and the canopy material (wash with fresh water).
- Avoid bending your lines, especially in a small radius.
- Avoid opening your glider in strong winds without first untangling the lines.
- In general, avoid exposing your glider to very hot or humid environments, UV radiation or chemicals.

# Packing instructions

It is important to correctly pack your glider as this prolongs its lifespan. We recommend that you fold the glider like an accordion, neatly aligning each cell profile with the next one and laying the leading edge reinforcements side by side. The wing should then be folded in three or two folds. The wing should be packed as loosely as possible. While packing be careful not to trap any grasshoppers inside your canopy as they will tear the canopy cloth. Adhering to these simple rules will make your glider last longer and ensure its best performance.

## Storage

Correctly packed, store your glider in a dry place at room temperature. The glider should not be stored damp, wet, sandy, salty or with objects inside the cells of the glider. Keep your equipment away from any chemicals.

## Cleaning

If necessary always clean your glider with fresh water and a cloth only, without using any cleaning chemicals. This includes the lines and canopy. More importantly, always remove any stones or sand from the canopy as they will gradually damage the material and reduce the glider's lifespan.

## Repair

To repair small damages (less than 5cm) on the canopy, you can use the rip stop tape. Greater damages, including stitches and

lines, must be repaired by a qualified repair shop. Damaged lines should be replaced by a Triple Seven dealer. When replacing a line it should always be compared with the counterpart for adjusting the appropriate length. After replacing a line, the wing should be inflated before flying, to ensure that everything was done correctly. Major repairs, such as replacing panels, should only be carried out by a Triple Seven distributor or Triple Seven. If you are unsure about the damage or in any doubt please contact Triple Seven.

## Checks and control

To ensure the wing's airworthiness the Q-light should be periodically serviced and checked to guarantee that it continues to fulfil the EN certification results, and to extend your glider's life span. We recommend a line check and trim inspection every 100 hours or 12 months, depending on what happens first. After that, the glider needs to be fully checked after 150 hours or 24 months of usage, whichever comes first. This inspection includes checking the suspension lines, line geometry, riser geometry and the permeability of the canopy material. A certified inspector can then define the check interval depending on the glider's condition. Please note that the condition of the glider can vary considerably depending on the type of usage and environment. Salty coastal air or dunes will considerably affect your wing's material. For more information please visit our website.



# Packing the Q-light

## 1. FOLD THE GLIDER LIKE HARMONICA



## 2. ALIGN THE CELLS






### 3. FOLD LEADING EDGE BACK TOWARD TRAILING EDGE AND ALIGN THE CELS




### 4. FOLD THE GLIDER IN THREE PARTS

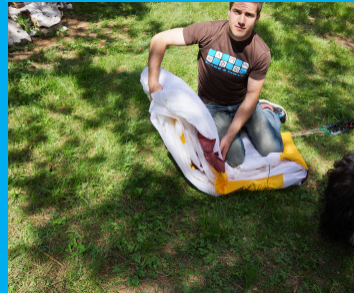


### 5. FINISHED



# Technical data

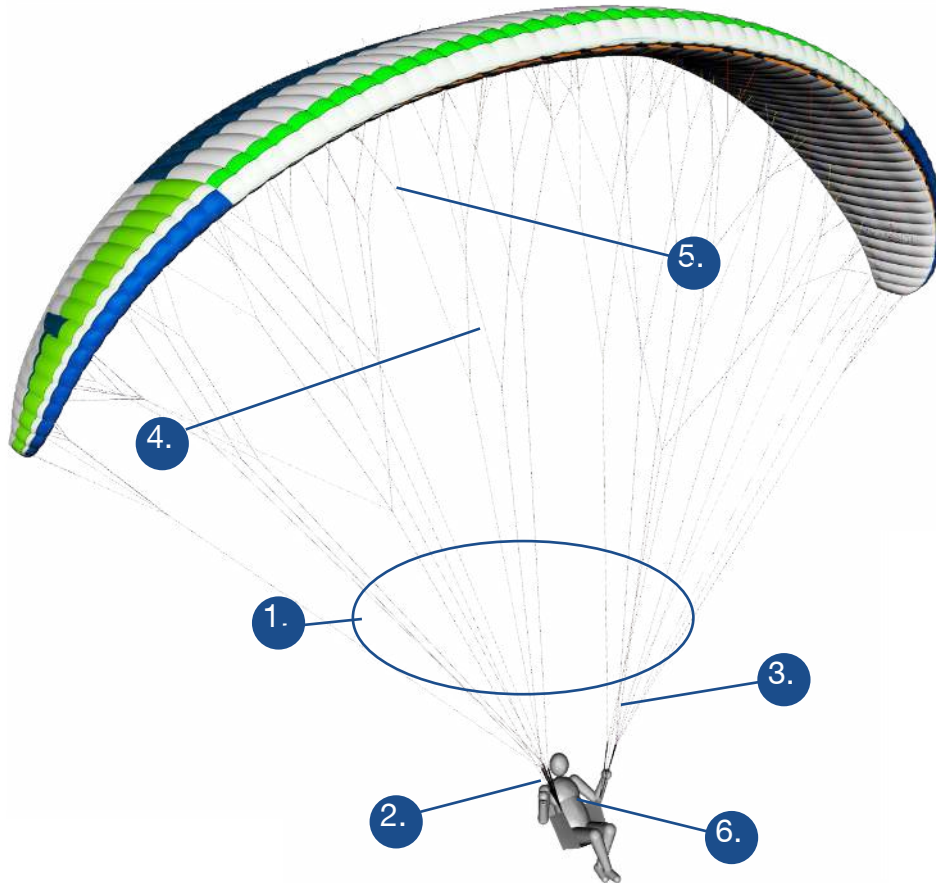

1. Suspension lines
2. Risers
3. Main lines
4. Middle cascades
5. Upper cascades
6. Brake lines

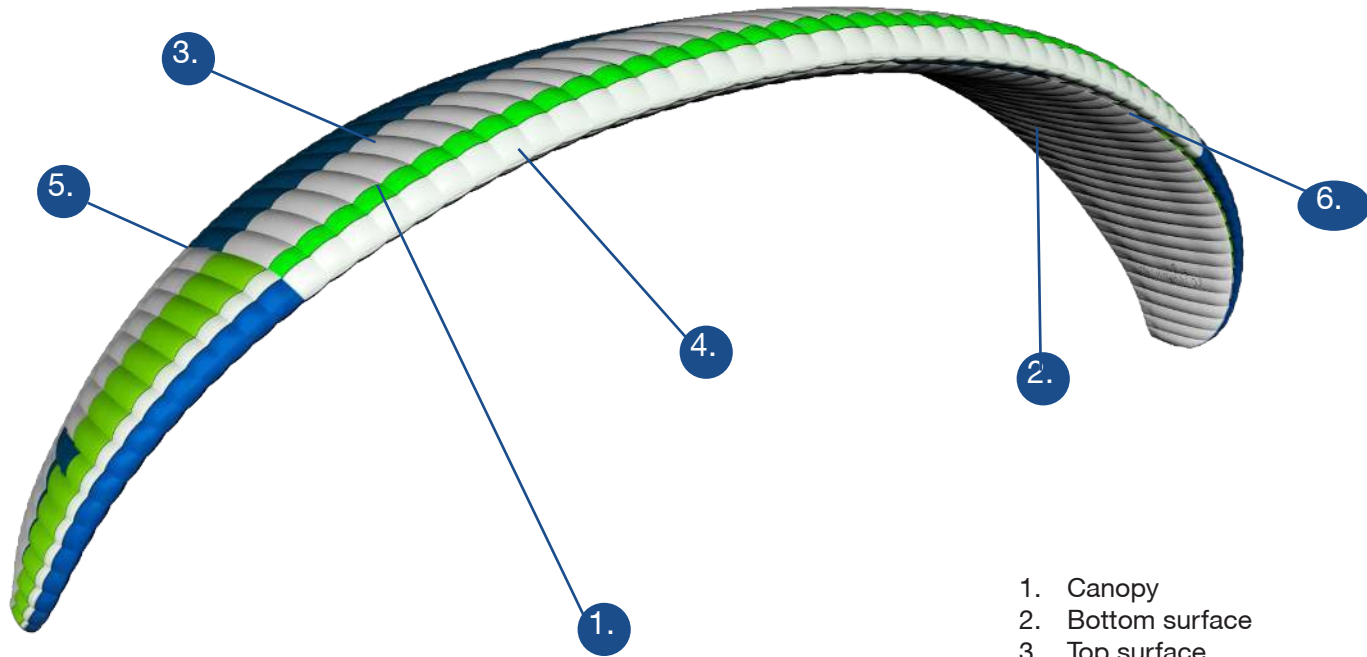

1. Canopy
2. Bottom surface
3. Top surface
4. Leading edge
5. Trailing edge
6. Intake cell openings

# Technical data

<b>SIZE</b>			<b>Q-light S</b>	<b>Q-light MS</b>	<b>Q-light ML</b>	<b>Q-light L</b>
CELLS	NUMBER		73	73	73	73
FLAT	AREA	m <sup>2</sup>	23.6	25.3	26	27
	SPAN	m	12.1	12.6	12.8	13
	ASPECT RATIO		6.3	6.3	6.3	6.3
PROJECTED	AREA	m <sup>2</sup>	20	21.4	22	22.9
	SPAN		9.6	9.9	10	10.2
	ASPECT RATIO		4.6	4.6	4.6	4.6

<b>RISERS</b>		<b>A</b>	<b>A3</b>	<b>B</b>	<b>C</b>	
Q-light S	LENGTHS (mm)	520	490	520	520	STANDARD
Q-light S	LENGTHS (mm)	380	357	430	520	ACCELERATED
S-Distance between pulleys: 140						

Q-light MS	LENGTHS (mm)	530	500	530	530	STANDARD
Q-light MS	LENGTHS (mm)	380	365	430	530	ACCELERATED
MS-Distance between pulleys: 150						

Q-light ML	LENGTHS (mm)	540	510	540	540	STANDARD
Q-light ML	LENGTHS (mm)	370	345	430	540	ACCELERATED
ML-Distance between pulleys: 170						

Q-light L	LENGTHS (mm)	550	520	550	550	STANDARD
Q-light L	LENGTHS (mm)	380	370	445	550	ACCELERATED
L-Distance between pulleys: 170						

Glider weight	(kg)	4.0	4.8	5.4	5.6
	TRIMERS	NO	NO	NO	NO

IN FLIGHT WEIGHT MINIMUM	kg	70	79	95	100
	MAXIMUM	kg	85	99	108

# Materials list

<b>CANOPY</b>	<b>FABRIC CODE</b>
Leading edge	Dominico 30
Upper surface	Porcher Skytex 27 universal
Bottom surface	Porcher Skytex 27 universal
Profiles	Porcher Skytex 27 Hard
Diagonals	Porcher Skytex 27 Hard
Internal construction D-Ribs, H-Straps, Mini ribs	Porcher Skytex 27 Hard


<b>SUSPENSION LINES</b>	<b>FABRIC CODE</b>
Upper cascades	Edelrid A8000U
Middle	Edelrid A8000U
Main	Liros PPSLS, Edelrid A8000U
Brake lines	Edelrid A8000U
Main brake	Liros PPSL 191

<b>RISERS</b>	<b>FABRIC CODE</b>
Material	Webbing Liros 13mm kevlar
Brake ring	Tylaska 4 (original)
Pulleys	4x Harken P18

There is no other adjustable device on the Q-light wing.

The spare parts can be obtained by Triple Seven dealers and representatives which can be found at [www.777gliders.com](http://www.777gliders.com)


# Q-light riser design

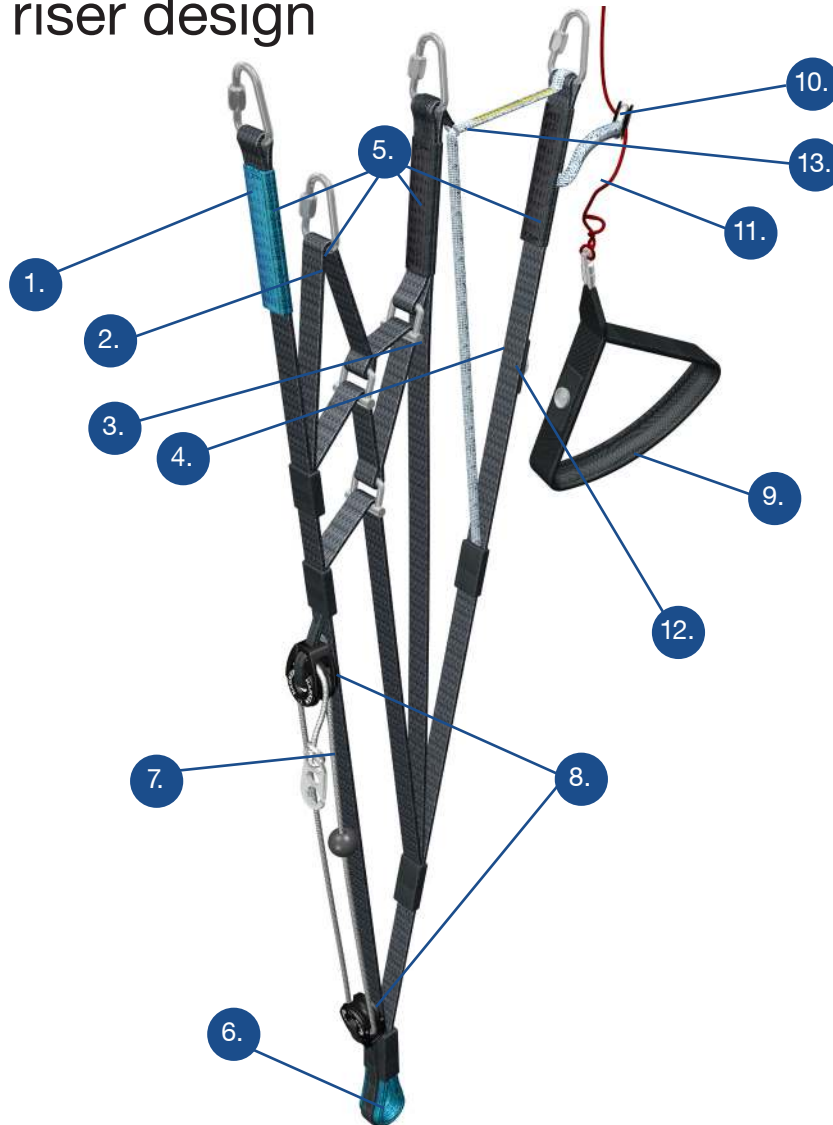

1. A1 riser
2. A2 riser, (Ears)
3. B riser, (B-Stall)
4. C riser
5. Maillons
6. Main attachment point
7. Speed bar attachment point
8. Speed bar pulleys
9. Brake handle
10. Brake line Tylaska ring
11. Main brake line
12. Clip for brake handle
13. BC system
14. Q-light has no trimmers or any other adjustable or removable device





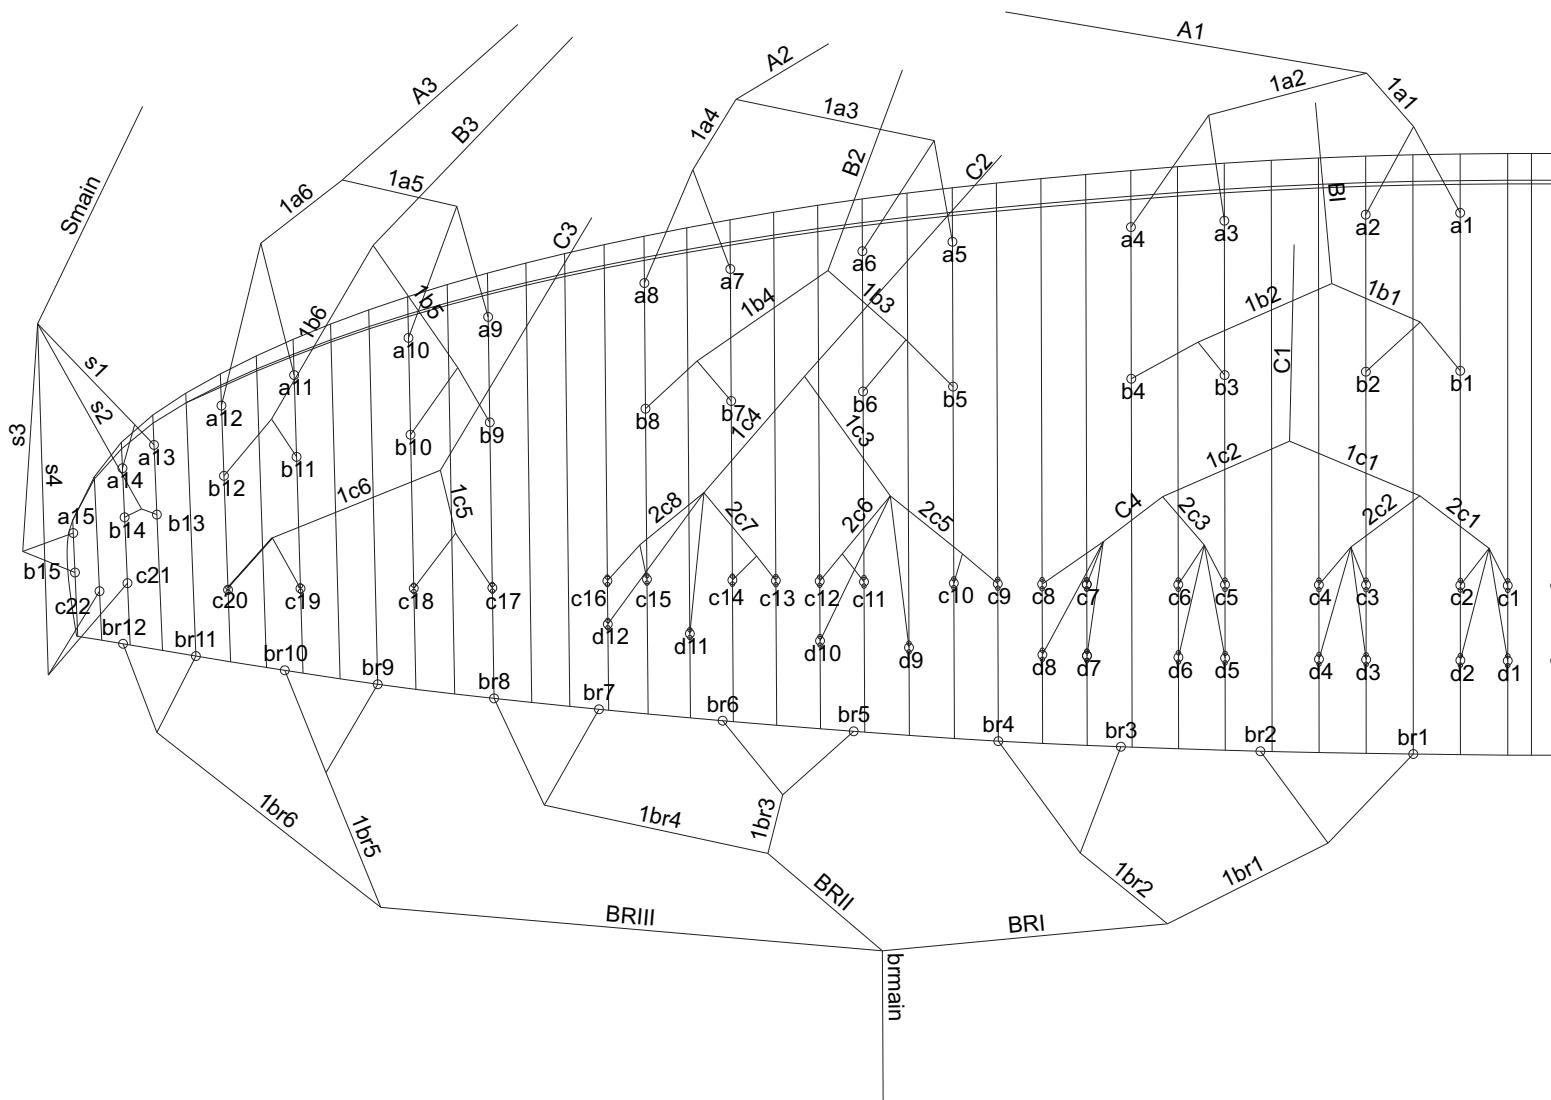



# Line lengths Q-light S

Line lengths shall be specified when measured under a tension of 50 N, this tension being slowly and gradually applied before taking the measurement.

## Triple Seven Q-light S Lines Length (mm)

### First gallery

Lines A	mm	Lines B	mm	Lines C	mm	Lines D	mm	BR lines	mm
a1	686	b1	902	c1	566	d1	660	br1	924
a2	590	b2	826	c2	493	d2	598	br2	646
a3	622	b3	793	c3	429	d3	537	br3	573
a4	668	b4	819	c4	421	d4	530	br4	598
a5	669	b5	699	c5	429	d5	533	br5	687
a6	592	b6	631	c6	412	d6	517	br6	557
a7	597	b7	617	c7	449	d7	541	br7	499
a8	627	b8	632	c8	501	d8	583	br8	531
a9	614	b9	601	c9	462	d9	1091	br9	498
a10	517	b10	502	c10	386	d10	1070	br10	389
a11	572	b11	547	c11	257	d11	1064	br11	363
a12	561	b12	523	c12	267	d12	1068	br12	420
a13	239	b13	222	c13	272				
a14	173	b14	177	c14	226				
a15	443	b15	466	c15	324				
				c16	352				
				c17	602				
				c18	497				
				c19	517				
				c20	481				
				c21	189				
				c22	180				

# Line lengths Q-light S

Line lengths shall be specified when measured under a tension of 50 N, this tension being slowly and gradually applied before taking the measurement.

<b>Triple Seven Q-light S</b> Lines Length (mm)						<b>TOTAL LINE LENGTHS</b>							
<b>Second gallery</b>						a1	7340	c1	7404	d1	7498		
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>						
1a1	1309	1b1	1564	2c1	961	1br1	1017	a2	7240	c2	7333	d2	7435
1a2	1244	1b2	1565	2c2	950	1br2	964	a3	7210	c3	7255	d3	7363
1a3	1285	1b3	1454	2c3	769	1br3	1065	a4	7257	c4	7248	d4	7358
1a4	1239	1b4	1427	2c4	768	1br4	1065	a5	7198	c5	7233	d5	7338
1a5	1320	1b5	1187	2c5	687	1br5	632	a6	7121	c6	7220	d6	7323
1a6	1155	1b6	1042	2c6	740	1br6	621	a7	7083	c7	7251	d7	7345
s1	1143	s2	1118	2c7	791			a8	7112	c8	7303	d8	7385
s3	773			2c8	689			a9	6950	c9	7286	d9	7230
				1c5	1292			a10	6855	c10	7211	d10	7207
				1c6	1167			a11	6741	c11	7133	d11	7129
				s4	1141			a12	6726	c12	7142	d12	7125
								a13	6550	c13	7125	br1	7628
								a14	6488	c14	7081	br2	7360
								a15	6387	c15	7079	br3	7236
<b>Third gallery</b>						b1	7241	c16	7103	br4	7251		
				<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	b2	7162	c17	6983	br5	7037
				1c1	1209	BRI	2985	b3	7128	c18	6881	br6	6907
				1c2	1369	BRII	2578	b4	7155	c19	6773	br7	6854
				1c3	1202	BRIII	2852	b5	7116	c20	6737	br8	6884
				1c4	1128			b6	7044	c21	6505	br9	6698
								b7	7007	c22	6493	br10	6588
								b8	7017			br11	6550
								b9	6907			br12	6605
								b10	6809				
<b>Main Lines</b>						b11	6705						
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	b12	6677				
A1	4826	B1	4247	C1	4162	br main1	1147	b13	6511				
A2	4727	B2	4439	C2	4426	br main	1500	b14	6465				
A3	4534	B3	4605	C3	4575			b15	6408				
		Stab main	4651										

# Line lengths Q-light MS

Line lengths shall be specified when measured under a tension of 50 N, this tension being slowly and gradually applied before taking the measurement.

## Triple Seven Q-light MS Lines Length (mm)

### First gallery

Lines A	mm	Lines B	mm	Lines C	mm	Lines D	mm	BR lines	mm
a1	676	b1	724	c1	478	d1	592	br1	961
a2	585	b2	642	c2	403	d2	531	br2	668
a3	619	b3	639	c3	414	d3	543	br3	595
a4	653	b4	659	c4	411	d4	539	br4	630
a5	637	b5	687	c5	419	d5	536	br5	710
a6	568	b6	630	c6	392	d6	513	br6	576
a7	568	b7	650	c7	392	d7	497	br7	523
a8	596	b8	653	c8	445	d8	538	br8	550
a9	657	b9	616	c9	398	d9	1005	br9	504
a10	572	b10	531	c10	319	d10	941	br10	421
a11	654	b11	549	c11	252			br11	335
a12	646	b12	531	c12	280			br12	411
a13	237	b13	216	c13	281				
a14	188	b14	175	c14	220				
a15	469	b15	491	c15	330				
				c16	367				
				c17	592				
				c18	505				
				c19	490				
				c20	462				
				c21	190				
				c22	182				

# Line lengths Q-light MS

Triple Seven Q-light MS Lines Length (mm)								TOTAL LINE LENGTHS					
<b>Second gallery</b>								a1	7514	c1	7575	d1	7688
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	a2	7423	c2	7499	d2	7629
1a1	1438	1b1	1670	2c1	1070	1br1	1073	a3	7390	c3	7426	d3	7554
1a2	1370	1b2	1642	2c2	984	1br2	1006	a4	7425	c4	7422	d4	7550
1a3	1362	1b3	1608	2c3	793	1br3	1125	a5	7365	c5	7410	d5	7530
1a4	1322	1b4	1547	2c4	825	1br4	1131	a6	7286	c6	7383	d6	7507
1a5	1278	1b5	1312	2c5	656	1br5	629	a7	7243	c7	7415	d7	7522
1a6	1087	1b6	1181	2c6	662	1br6	685	a8	7268	c8	7460	d8	7564
s1	1318	s2	1312	2c7	683			a9	7123	c9	7429	d9	7394
s3	934			2c8	561			a10	7035	c10	7354	d10	7294
				1c5	1322			a11	6923	c11	7297	br1	7777
				1c6	1235			a12	6918	c12	7325	br2	7487
				s4	1327			a13	6699	c13	7313	br3	7347
								a14	6641	c14	7252	br4	7378
								a15	6557	c15	7239	br5	7159
<b>Third gallery</b>								b1	7432	c16	7276	br6	7024
				<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	b2	7354	c17	7132	br7	6978
				1c1	1461	BRI	2648	b3	7323	c18	7047	br8	7005
				1c2	1634	BRII	2227	b4	7343	c19	6942	br9	6868
				1c3	1630	BRIII	2642	b5	7291	c20	6916	br10	6786
				1c4	1596			b6	7231	c21	6663	br11	6759
								b7	7192	c22	6655	br12	6841
								b8	7193				
								b9	7078				
								b10	6988				
								b11	6871				
								b12	6853				
								b13	6680				
								b14	6638				
								b15	6575				
<b>Main Lines</b>													
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>						
A1	4874	B1	4510	C1	4056	br main1	1758						
A2	4835	B2	4467	C2	4242	br main	1300						
A3	4703	B3	4633	C3	4699								
		Stab main	4626										

# Line lengths Q-light ML

Line lengths shall be specified when measured under a tension of 50 N, this tension being slowly and gradually applied before taking the measurement.

## Triple Seven Q-light ML Lines Length (mm)

### First gallery

Lines A	mm	Lines B	mm	Lines C	mm	Lines D	mm	BR lines	mm
a1	686	b1	735	c1	487	d1	603	br1	978
a2	594	b2	652	c2	411	d2	541	br2	681
a3	628	b3	649	c3	422	d3	553	br3	607
a4	663	b4	669	c4	419	d4	549	br4	639
a5	650	b5	697	c5	427	d5	546	br5	721
a6	580	b6	639	c6	400	d6	523	br6	588
a7	580	b7	660	c7	400	d7	506	br7	529
a8	609	b8	663	c8	454	d8	548	br8	556
a9	664	b9	625	c9	406	d9	1022	br9	512
a10	578	b10	539	c10	326	d10	957	br10	427
a11	664	b11	557	c11	258			br11	337
a12	656	b12	539	c12	286			br12	417
a13	241	b13	221	c13	287				
a14	191	b14	180	c14	225				
a15	476	b15	500	c15	337				
				c16	374				
				c17	601				
				c18	513				
				c19	497				
				c20	471				
				c21	195				
				c22	187				

# Line lengths Q-light ML

## Triple Seven Q-light ML Lines Length (mm)

### Second gallery

Lines A	mm	Lines B	mm	Lines C	mm	BR lines	mm	TOTAL LINE LENGHTS							
1a1	1459	1b1	1695	2c1	1086	1br1	1089	a1	7625	c1	7704	d1	7821		
1a2	1390	1b2	1666	2c2	999	1br2	1021	a2	7533	c2	7631	d2	7757		
1a3	1382	1b3	1632	2c3	805	1br3	1142	a3	7498	c3	7552	d3	7683		
1a4	1342	1b4	1570	2c4	837	1br4	1148	a4	7533	c4	7549	d4	7680		
1a5	1297	1b5	1332	2c5	666	1br5	638	a5	7479	c5	7536	d5	7654		
1a6	1103	1b6	1199	2c6	672	1br6	695	a6	7407	c6	7509	d6	7630		
s1	1338	s2	1332	2c7	693			a7	7366	c7	7542	d7	7645		
s3	948			2c8	569			a8	7394	c8	7594	d8	7690		
				1c5	1342			a9	7240	c9	7551	d9	7505		
				1c6	1253			a10	7150	c10	7472	d10	7407		
				1c6	1253			a11	7038	c11	7410	br1	7948		
				s4	1349			a12	7025	c12	7438	br2	7655		
								a13	6816	c13	7426	br3	7510		
								a14	6767	c14	7367	br4	7541		
								a15	6660	c15	7357	br5	7321		

### Third gallery

				Lines C	mm	BR lines	mm	b1	c16	7392	br6	7186	
				1c1	1461	BRI	2687	b2	7466	c17	7244	br7	7135
				1c2	1634	BRII	2260	b3	7433	c18	7157	br8	7159
				1c3	1630	BRIII	2681	b4	7452	c19	7054	br9	7030
				1c4	1596			b5	7402	c20	7025	br10	6947
								b6	7342	c21	6787	br11	6913
								b7	7299	c22	6776	br12	6990
								b8	7303				
								b9	7197				
								b10	7105				
								b11	6987				

### Main Lines

Lines A	mm	Lines B	mm	Lines C	mm	BR lines	mm	b12	6966				
A1	4947	B1	4577	C1	4116	br main1	1794	b13	6789				
A2	4907	B2	4534	C2	4300	br main	1319	b14	6748				
A3	4773	B3	4702	C3	4767			b15	6687				
		Stab main	4695										

# Line lengths Q-light L

Line lengths shall be specified when measured under a tension of 50 N, this tension being slowly and gradually applied before taking the measurement.

## Triple Seven Q-light L Lines Length (mm)

### First gallery

Lines A	mm	Lines B	mm	Lines C	mm	Lines D	mm	BR lines	mm
a1	699	b1	748	c1	496	d1	614	br1	996
a2	605	b2	663	c2	419	d2	551	br2	693
a3	640	b3	660	c3	430	d3	563	br3	618
a4	675	b4	681	c4	427	d4	559	br4	651
a5	661	b5	710	c5	435	d5	556	br5	734
a6	590	b6	651	c6	407	d6	532	br6	598
a7	590	b7	672	c7	407	d7	516	br7	538
a8	620	b8	675	c8	462	d8	558	br8	566
a9	676	b9	637	c9	413	d9	1041	br9	521
a10	589	b10	549	c10	332	d10	975	br10	435
a11	676	b11	567	c11	262			br11	343
a12	668	b12	549	c12	291			br12	425
a13	245	b13	225	c13	292				
a14	194	b14	183	c14	229				
a15	485	b15	509	c15	343				
				c16	381				
				c17	612				
				c18	522				
				c19	506				
				c20	480				
				c21	198				
				c22	190				



# Line lengths Q-light L

Triple Seven Q-light L Lines Length (mm)								TOTAL LINE LENGHTS					
<b>Second gallery</b>								a1	7776	c1	7839	d1	7955
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	a2	7681	c2	7763	d2	7893
1a1	1486	1b1	1726	2c1	1106	1br1	1109	a3	7644	c3	7682	d3	7814
1a2	1416	1b2	1697	2c2	1017	1br2	1040	a4	7676	c4	7680	d4	7810
1a3	1408	1b3	1662	2c3	820	1br3	1163	a5	7617	c5	7669	d5	7788
1a4	1366	1b4	1599	2c4	853	1br4	1169	a6	7546	c6	7641	d6	7764
1a5	1321	1b5	1356	2c5	678	1br5	650	a7	7493	c7	7674	d7	7782
1a6	1123	1b6	1220	2c6	684	1br6	708	a8	7526	c8	7730	d8	7826
s1	1362	s2	1356	2c7	706			a9	7366	c9	7689	d9	7645
s3	965			2c8	580			a10	7277	c10	7614	d10	7547
				1c5	1366			a11	7161	c11	7551	br1	8049
				1c6	1276			a12	7147	c12	7578	br2	7746
				s4	1373			a13	6928	c13	7564	br3	7600
								a14	6879	c14	7501	br4	7633
								a15	6769	c15	7494	br5	7410
<b>Third gallery</b>								b1	7677	c16	7531	br6	7281
				<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	b2	7594	c17	7372	br7	7220
				1c1	1510	BR I	2737	b3	7561	c18	7284	br8	7249
				1c2	1689	BR II	2301	b4	7581	c19	7177	br9	7117
				1c3	1685	BR III	2730	b5	7532	c20	7151	br10	7030
				1c4	1649			b6	7473	c21	6899	br11	7002
								b7	7427	c22	6885	br12	7071
								b8	7430				
								b9	7317				
								b10	7224				
								b11	7105				
<b>Main Lines</b>								b12	7084				
<b>Lines A</b>	<b>mm</b>	<b>Lines B</b>	<b>mm</b>	<b>Lines C</b>	<b>mm</b>	<b>BR lines</b>	<b>mm</b>	b13	6904				
A1	5037	B1	4653	C1	4184	br main1	1827	b14	6861				
A2	4997	B2	4608	C2	4371	br main	1343	b15	6792				
A3	4859	B3	4780	C3	4856								
		Stab main	4773										

# Certification specimens

# Brake handle - attachment procedure



To properly adjust the brake handle into the riser loop, use the side of the brake handle. If you use the bottom side, it can happen that when on take-off next time, you pull the handle through the loop.



In order to avoid that, you use the side of the brake handle and pull it through the loop only by 3-4 cm. With that, next time when on take-off, you will instinctively pull the brake handle to the right side avoiding having brake line running through the loop.

# Soft links - assembling



Run the line twice through the loop of the riser and twice through the loop of the lines.



With the loop side of the soft link, run the line through the small loop hole at the side of the black arrow. Pull the line firmly through for at least 2 cm.



Pull the loop, that is on the side of the soft link, over the black arrow. When you do that, pull it fully to the bottom of the black arrow.



The loop needs to pass the whole black arrow till the end.



Take great care to bend the black arrow towards the risers.



Once you have done that, pull the protecting pocket over the soft link.

# Safety and responsibility

Paragliding is a dangerous, high risk activity, where safety depends on the person practicing it. By purchasing this equipment you implicitly declare to be a certified paragliding pilot, and you accept all risks involved in paragliding activities, including the risk of serious injury or death. Improper use or misuse of paragliding equipment further increases these risks.

The designer, manufacturer, distributor, wholesaler and retailer cannot and will not guarantee your safety when using this equipment, nor accept responsibility for any damage, injury or death as a result of the use of this equipment. This equipment should only be used by qualified and competent pilots or by pilots under supervision of qualified paragliding instructors. You must not use this equipment if you are not trained.

You alone as a qualified and competent pilot must take full responsibility to ensure that you understand the correct and safe use and maintenance of this paragliding equipment and to use it only for the purpose that it was designed for and to practice all proper safety procedures before and during its use.

# Guarantee

Triple Seven WARRANTY:

All Triple Seven products are fully warranted for 12 months, against material defects that are not the result of normal wear or accidental damage.

**Warranty online reference:**

[www.777gliders.com/warranty](http://www.777gliders.com/warranty)

**Maintainance**

Periodic inspection is advised after every 100h or 2 years of flying.

**Disposal of the wing**

Please dispose the wing by sending it back to your closest dealer or directly to us.

# Registration information

To fully use all Triple Seven maintenance and warranty services you need to register your glider on our website. Wanting to provide good product support, we invite you to do so, even if you bought your glider second-hand.

## **Triple Seven Warranty & Product registration:**

<http://www.777gliders.com/tripleseven/support>

Disposal of the wing

Please contact your local dealer, or directly Triple Seven gliders in order to provide the right disposal of the wing when it is not used anymore.

# Get involved

As a new Triple Seven pilot we invite you to contact us in case of any technical or practical issues regarding equipment or techniques. We also invite you to send us your flying photos, videos or even postcards. We would like to hear from you and your exciting adventures with your new glider! Finally, join our Facebook community and share the passion. Have fun!



# Contact

## Triple Seven Gliders

**Company:** 777 jadralna padala d.o.o.

**Address:** Ulica IV prekomorske 61

**Postal Code / City:** 5270 Ajdovščina

**Country:** Slovenia

**Tel.:** +386 40 777 313

**Email:** [info@777gliders.com](mailto:info@777gliders.com)

## Online resources

**For complete help, the latest news, product information and support go to:**

**Official website:**

[www.777gliders.com](http://www.777gliders.com)

**Facebook:**

[www.facebook.com/TripleSevenParagliders](http://www.facebook.com/TripleSevenParagliders)

**Newsletter register:**

[www.777gliders.com/newsletter/subscriptions](http://www.777gliders.com/newsletter/subscriptions)

## Ask questions, make suggestions

**General questions:**

[info@777gliders.com](mailto:info@777gliders.com)

**Technical questions:**

[technical@777gliders.com](mailto:technical@777gliders.com)

TRIPLE SEVEN